



Programmable Logic Controllers

EH-150 Series

Modular Mini PLC

- Various communication options
- Economic application
- Various models
- Individually adaptable to customer requirements thanks to high-performance CPU and specialised I/O modules
- Up to 3520 I/Os
- 2 serial interfaces
- Quality assurance to ISO 9001 and ISO 14001
- 32 Bit-RISC-Micro-processor
- Ethernet module with integrated webserver available
- Open for all fieldbus systems thanks to ANYBUS®:
PROFIBUS-DP, DeviceNet, Ethernet, CANopen (coming soon)



DeviceNet.


CANopen



All features at a glance

Type	Modular Control System (Central Units)					
	EH-150 / CPU 104A	EH-150 / CPU 208A	EH-150 / CPU 316A	EH-150 / CPU 516	EH-150 / CPU548	
Power Supply	24 V DC	•	•	•	•	
	110 – 240 V AC	•	•	•	•	
Cycle time per binary instruction	1 µs	1 µs	1 µs	0.1 µs	0.1 µs	
Memory	Program (1 step = 4 byte)	16 kByte	32 kByte	64 kByte	64 kByte	192 kByte
	Data	14 kByte	22 kByte	50 kByte	50 kByte	106 kByte
	Type	FLASH and RAM	FLASH and RAM	FLASH and RAM	FLASH and RAM	FLASH and RAM
	pluggable	–	–	192 kByte for storing PLC program 384 kWord for storing data	192 kByte for storing PLC program 384 kWord for storing data	192 kByte for storing PLC program 384 kWord for storing data
Functions	Real Time Clock	–	•	•	•	
	Modem Interface	–	•	•	•	
Modules	Digital Inputs	8 / 16 / 32 / 64	8 / 16 / 32 / 64	8 / 16 / 32 / 64	8 / 16 / 32 / 64	8 / 16 / 32 / 64
	Type of Inputs	DC / AC	DC / AC	DC / AC	DC / AC	DC / AC
	Digital Outputs	8 / 16 / 32 / 64	8 / 16 / 32 / 64	8 / 16 / 32 / 64	8 / 16 / 32 / 64	8 / 16 / 32 / 64
	Type of Outputs	Relay/Trans/Triac	Relay/Trans/Triac	Relay/Trans/Triac	Relay/Trans/Triac	Relay/Trans/Triac
	Analogue Inputs	4 / 8	4 / 8	4 / 8	4 / 8	4 / 8
	Type of Analogue Inputs	I / U / PT100/1000/TC	I / U / PT100/1000/TC	I / U / PT100/1000/TC	I / U / PT100/1000/TC	I / U / PT100/1000/TC
	Analogue Outputs	4 / 8	4 / 8	4 / 8	4 / 8	4 / 8
	Type of Analogue Outputs	I / U	I / U	I / U	I / U	I / U
	Expandable by Expansion Rack	–	•	•	•	•
	Expandable by Distributed I/Os	–	–	•	•	•
	Counter	1 or 2 channels 100 kHz	1 or 2 channels 100 kHz	1 or 2 channels 100 kHz	1 or 2 channels 100 kHz	1 or 2 channels 100 kHz
	Positioning	1 axis, pulse output	1 axis, pulse output	1 axis, pulse output	1 or 4 axis, pulse output	1 or 4 axis, pulse output
	Number of Modules	3, 5 or 8	3, 5 or 8	3, 5 or 8	3, 5, 8 or 11	3, 5, 8 or 11
	Max. Number of Modules (central)	8	16	16	33	55
Max. Number of Expansion Racks	0	1	1	2	4	
Special Functions	32 bit RISC Processor	•	•	•	•	
	PID Control	–	–	•	•	
	Floating Point Processing	–	–	•	•	
	Trigonometric Functions	–	–	•	•	
Communication	Serial	RS-232 (2x)	RS-232 (2x)	RS-232 / RS-485	RS-232 / RS-485	RS-232 / RS-485
	Profibus-DP	–	–	•	•	
	DeviceNet	–	–	•	•	
	CANopen (coming soon)	–	–	coming soon	coming soon	coming soon
	ETHERNET	–	–	•	•	
Connections	Removable terminal blocks, plug connectors (32 and 64 I/O modules)					
Mounting	DIN rail or wall mounting					

EH-150 Series Dimensions

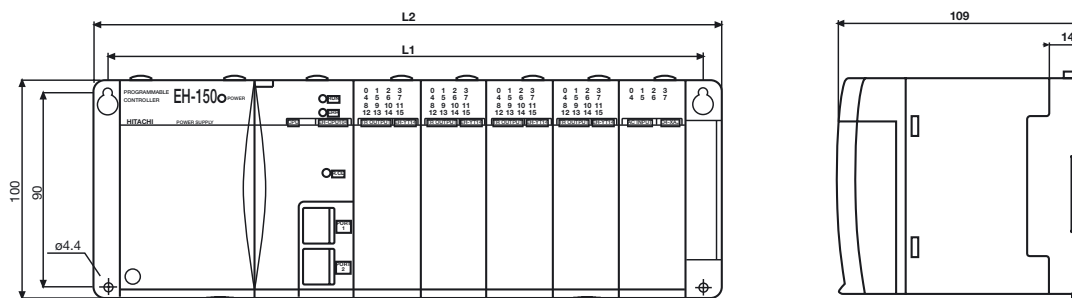

Type	EH-BS11A	EH-BS8A	EH-BS5A	EH-BS3A
I/O slot number	11	8	5	3
L1 mm	447	357	267	207
L2 mm	462.5	372.5	282.5	222.5

Hitachi Europe GmbH

Am Seestern 18 · D-40547 Düsseldorf
 Tel. +49-211-52 83 -0 · Fax +49-211-52 83 -649
 Internet: www.hitachi-ds.com
 E-Mail: info@hitachi-ds.com